


CROSS-FLOW FANS FOR DRY TYPE TRANSFORMERS

50HZ OPERATON

Dimensions

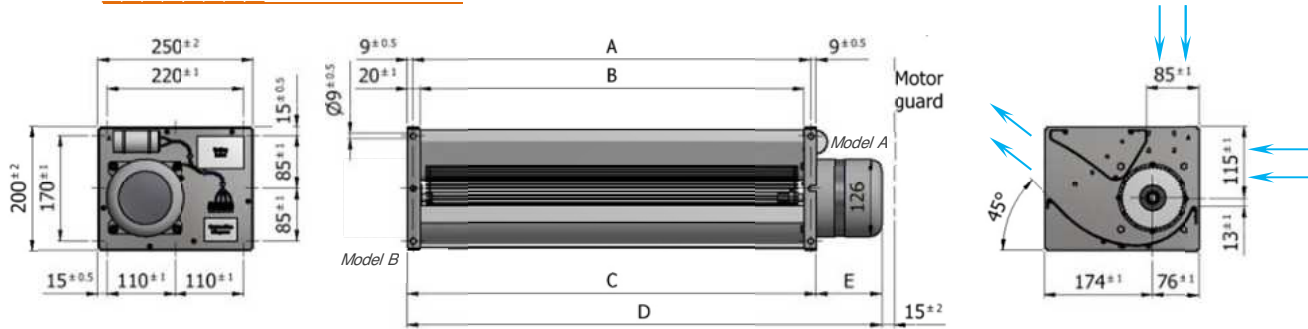

Optional Accesories



Model	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
CF100-620LN	642	620	660	765	105
CF100-620S	642	620	660	765	105
CF100-620M	642	620	660	805	145
CF100-620H	642	620	660	825	165
CF100-720LN	742	720	760	865	105
CF100-720S	742	720	760	865	105
CF100-720H	742	720	760	905	145
CF100-820LN	842	820	860	965	105
CF100-820S	842	820	860	965	105
CF100-820H	842	820	860	1005	145

Performance Data

Model	Supply Power	Input Power [W]	Speed [rpm]	Air Flow [m³/h]	Current [A]	Sound LpA@1m [dB(A)]	Weight [kg]
CF100-620LN	220~240VAC 50Hz single phase	150	930	1150	0,8	53	8,3
CF100-620S		240	1430	1600	1,6	63	8,3
CF100-620M		470	1900	2200	2,2	69	11,3
CF100-620H		700	2600	2700	3,2	79	12,8
CF100-720LN	220~240VAC 50Hz single phase	150	900	1300	0,8	53	8,5
CF100-720S		240	1400	1900	1,6	63	8,5
CF100-720H		490	1900	2500	2,3	69	11,5
CF100-820LN	220~240VAC 50Hz single phase	160	930	1500	0,8	53	8,7
CF100-820S		240	1400	2150	1,6	64	8,7
CF100-820H		570	1900	3100	2,5	70	11,7