


CROSS-FLOW FANS FOR DRY TYPE TRANSFORMERS

60HZ OPERATION

Dimensions

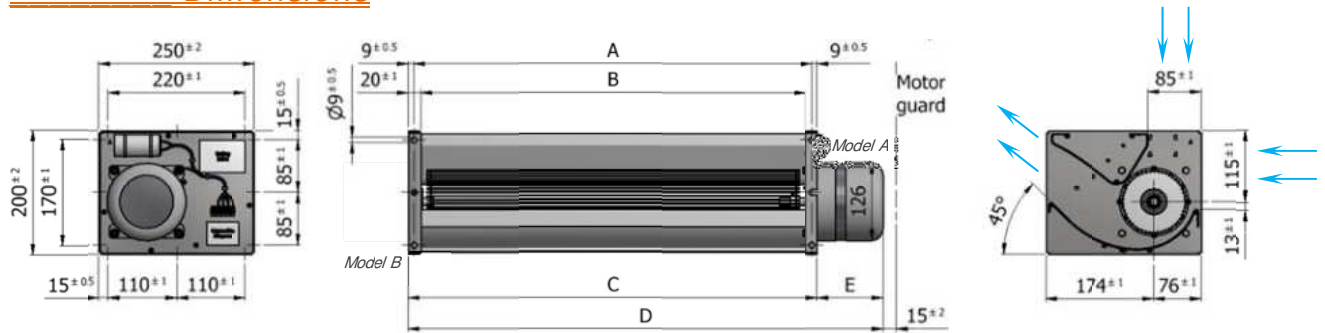

Optional Accesories



Model	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
CF100-620LN.60	642	620	660	765	105
CF100-620S.60	642	620	660	765	105
CF100-720LN.60	742	720	760	865	105
CF100-720S.60	742	720	760	865	105
CF100-820LN.60	842	820	860	965	105
CF100-820S.60	842	820	860	965	105

Performance Data

Model	Supply Power	Input Power [W]	Speed [rpm]	Air Flow [m³/h]	Current [A]	Sound LpA@1m [dB(A)]	Weight [kg]
CF100-620LN.60	220~240VAC 60Hz single phase	150	1090	1380	0,8	57	8,3
CF100-620S.60		240	1660	1900	1,5	67	8,3
CF100-720LN.60	220~240VAC 60Hz single phase	150	1100	1600	0,8	57	8,5
CF100-720S.60		250	1670	2350	1,5	67	8,5
CF100-820LN.60	220~240VAC 60Hz single phase	160	1100	1800	0,8	58	8,7
CF100-820S.60		250	1670	2600	1,5	68	8,7